
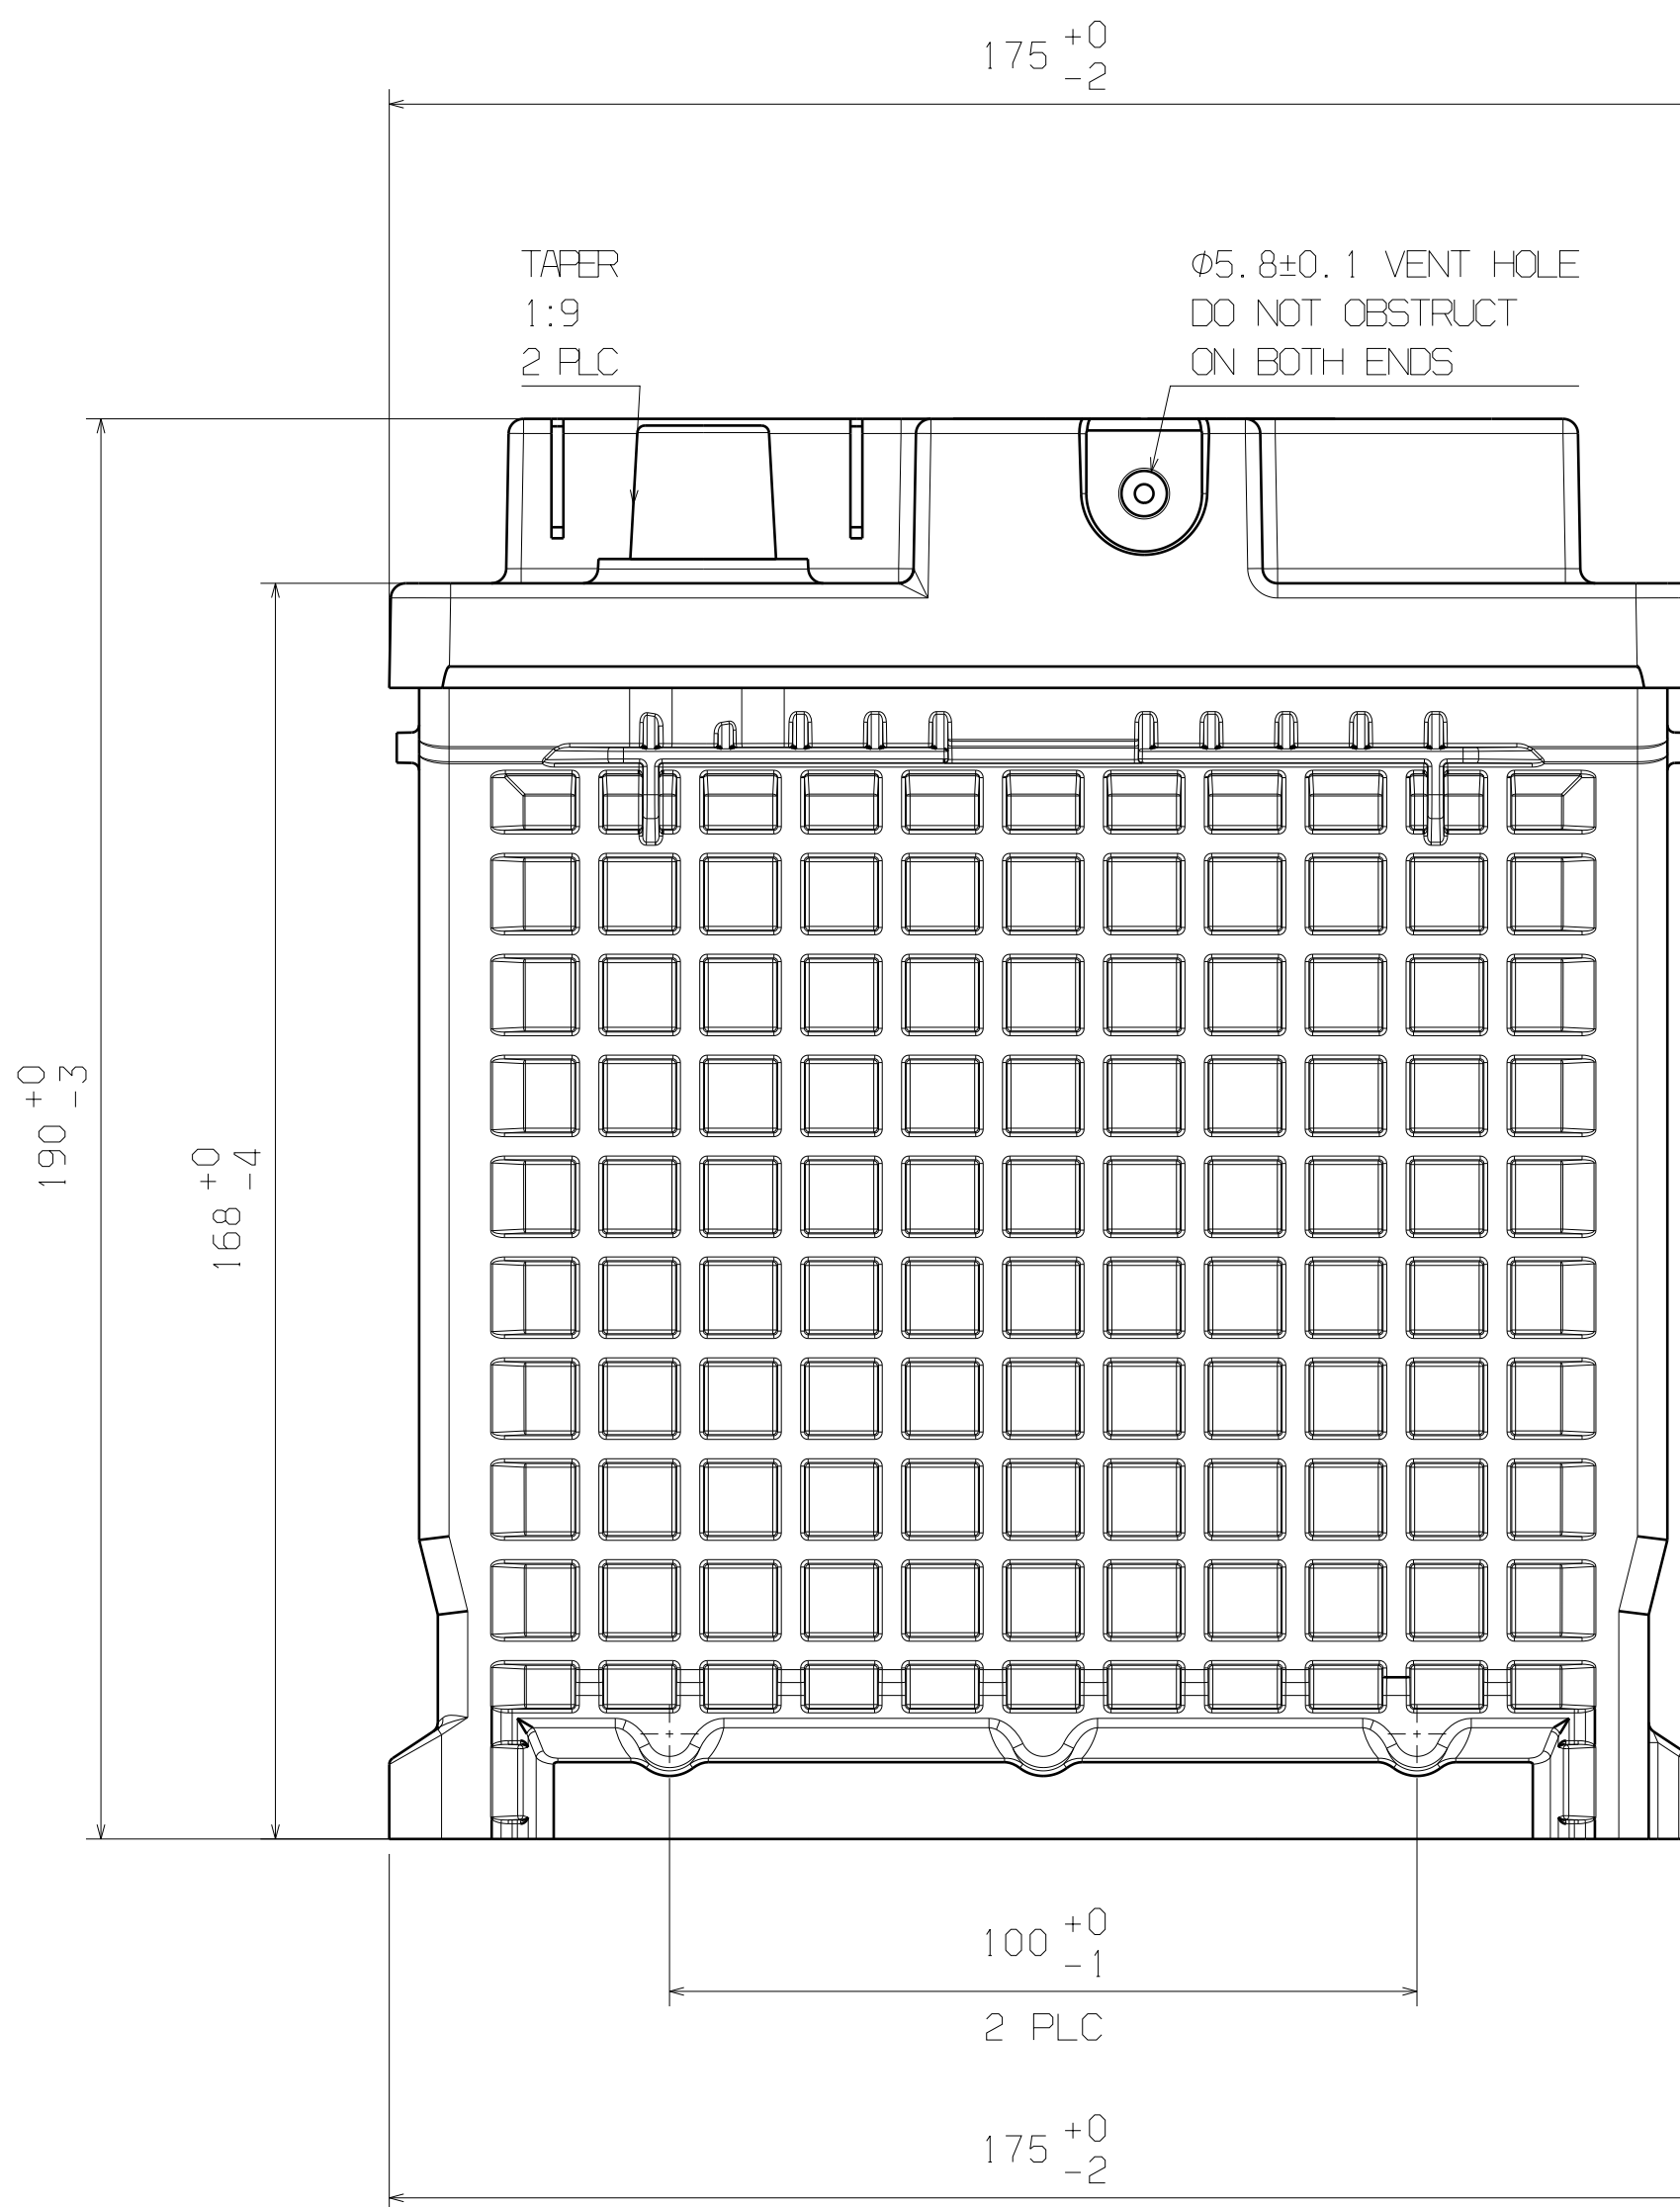


ISO VIEW
SCALE: 1:2

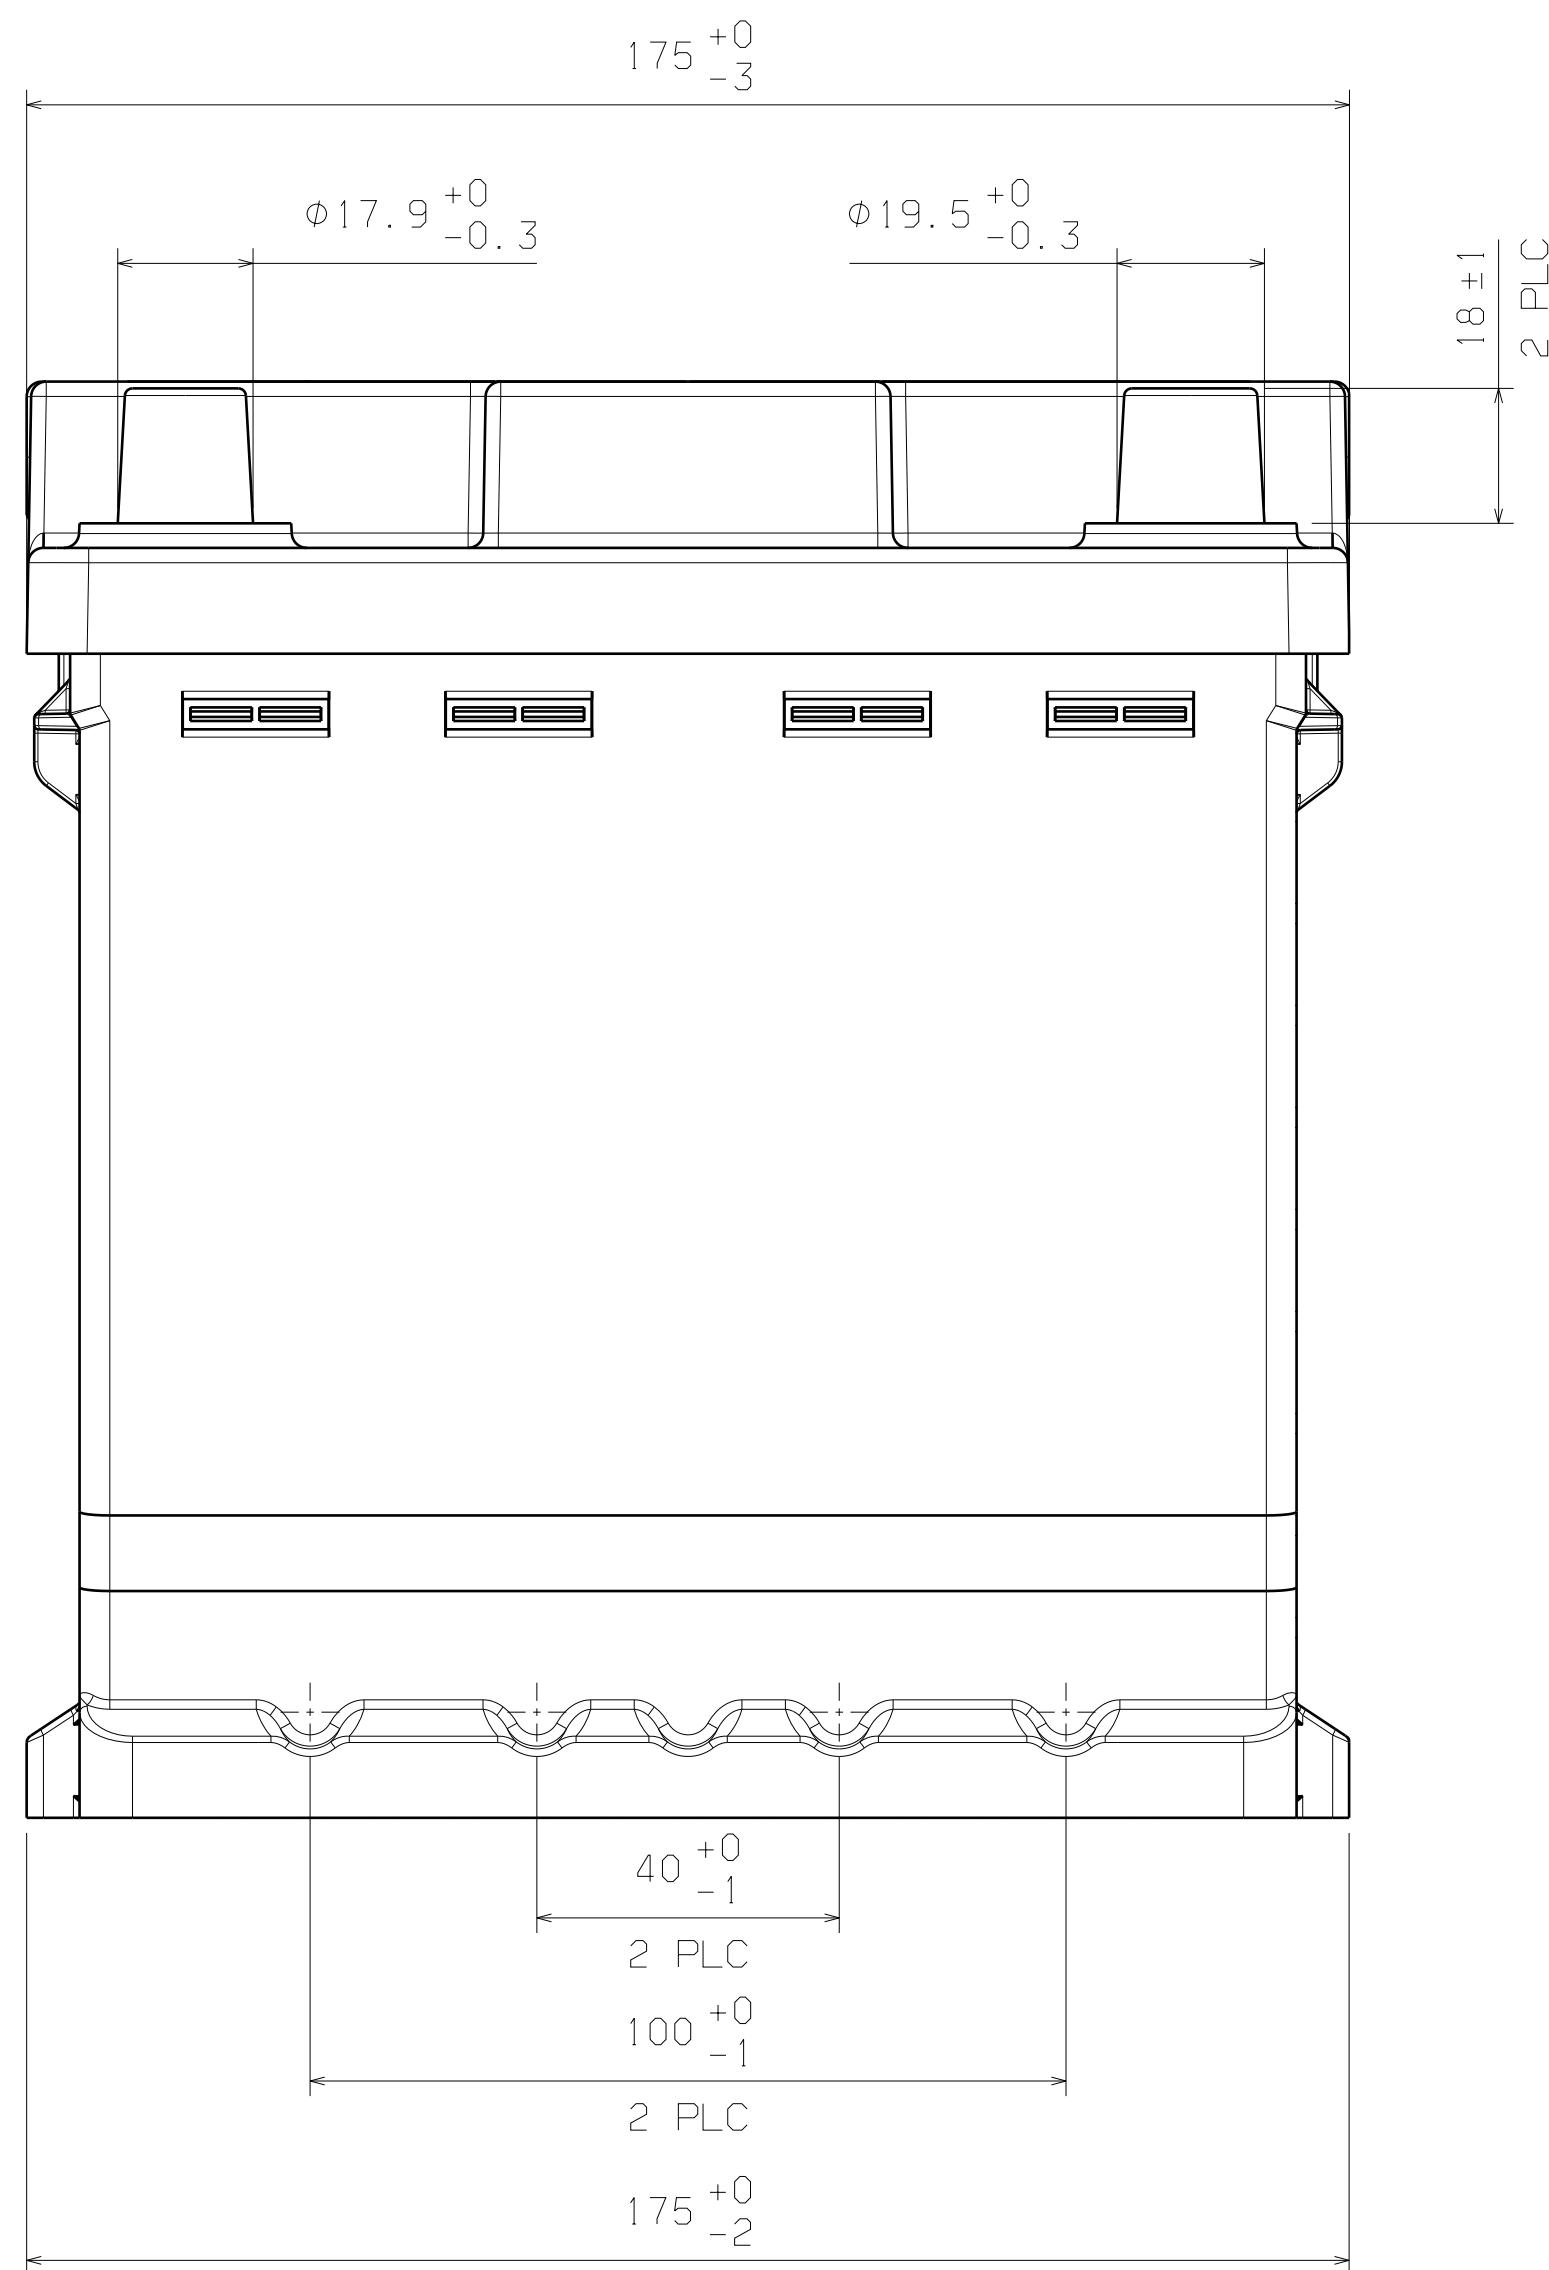

APPLICATION DATA

GROUP SIZE: LN0/H3 (AGM)

PERFORMANCE RATINGS: 12 VOLTS
 COLD CRANKING AMPERES AT -18°C 420 AMPS
 20 HOUR RATE: AMP HR (REF) 40 Ah

INSTALLATION INSTRUCTIONS:
 RECOMMENDED TERMINAL TORQUE SPECIFICATIONS:
 TOP TERMINAL POST 5.6~7.9(N.m)
 RECOMMENDED RETAINER TORQUE SPECIFICATIONS:
 BASE CLAMP 15~20(N.m)
 TOP BAR/FRAME 2.3~4.5 (N.m)

PRELIMINARY DRAWING 2022.03.29

4			
3			
2			
1			
ITEM	QTY	DRAWING NO	DESCRIPTION
⊕			KEY CRITICAL CHARACTERISTIC TO BE CHECKED AT INITIAL/SUBSEQUENT CUSTOMER PART SUBMISSION AND MONITORED PER CONTROL PLAN
⊕			SIGNIFICANT LEVEL-1 CHARACTERISTIC TO BE CHECKED AT INITIAL/SUBSEQUENT CUSTOMER PART SUBMISSION AND MONITORED PER CONTROL PLAN
⊕			SIGNIFICANT LEVEL-2 CHARACTERISTIC TO BE CHECKED AT INITIAL/SUBSEQUENT CUSTOMER PART SUBMISSION (ONE TIME CAPABILITY)
DIMENSIONS AND TOLERANCES ARE FOR FINISHED PART ACCEPTANCE			
RANGE	OVER	0	19.05 38.1 76.2 127 203.2 304.8 457.2 609.6
	TO	19.05 38.1 76.2 127 203.2 304.8 457.2 609.6	ANGLES
UNLESS OTHERWISE SPECIFIED POLYPROPYLENE PART TOLERANCES ARE: ±.13 ±.25 ±.51 ±.89 ±1.40 ±2.16 ±3.18 ±4.19 ±5.33 ±.5°			
DIMENSIONS AND TOLERANCES ARE IN ACCORDANCE WITH ASME Y14.5M-1994			
DO NOT SCALE DRAWING		THIRD ANGLE PROJECTION	DIMENSIONS ARE IN MILLIMETERS/INCHES
NOTICE: THIS DRAWING IS FURNISHED FOR REFERENCE ONLY. THE FURNISHING OR POSSESSION OF THIS DRAWING OR ANY REPRODUCTIONS THEREOF, DOES NOT CONVEY ANY MANUFACTURING RIGHTS.			Clarrios CONFIDENTIAL and PROPRIETARY information. Disclosure or use of this document or any information herein is prohibited without the express written consent of Clarrios. Unauthorized export is prohibited. © Clarrios. All rights reserved.
MATERIAL		CAD SYSTEM	REF INFO
TITLE		CATIA	-----
BAT OUTLINE AGM H3		3D MODEL NO	
ORIGINAL RELEASE AUTHORIZATION	SCALE	VERSION	REF INFO
DWR S.X DATE 03-29-22 SHEET 3/4 OF	00	00	30195408
CHK Y.Y DATE MM-DD-YY 1 1	CLARIOS	DWG NO	REV
ENGR HXG DATE MM-DD-YY SIZE D	3XXXXXXX	AA	